
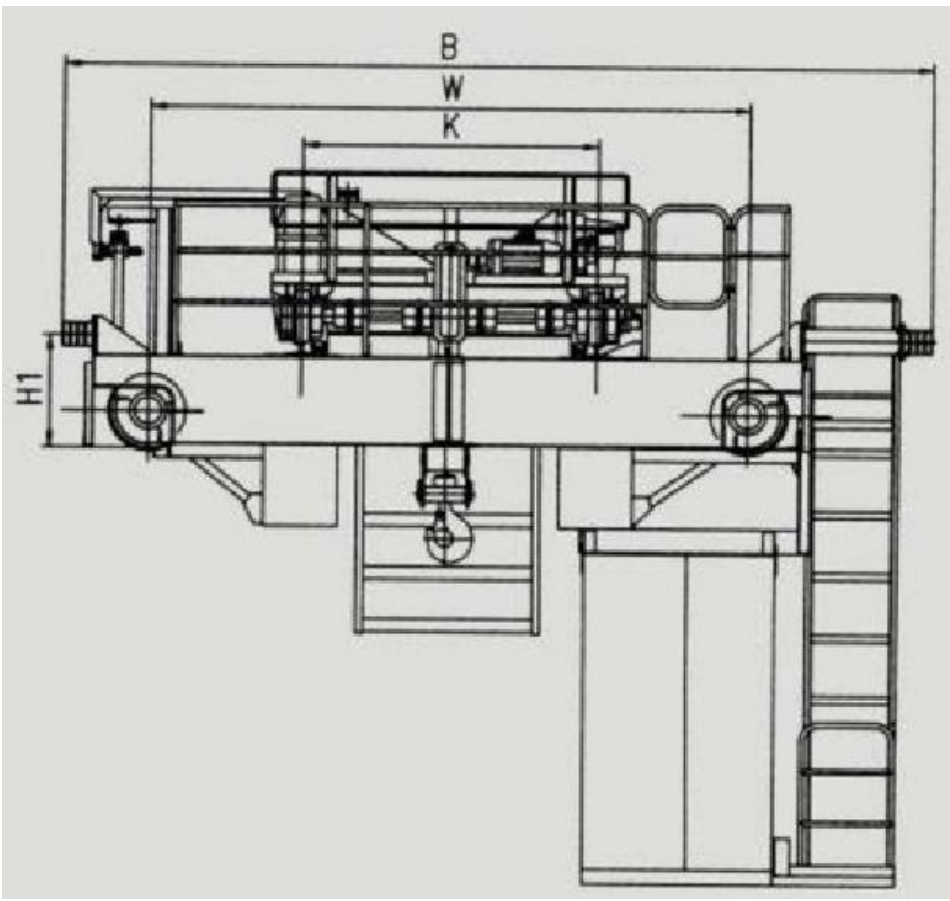




QB Explosion-proof Overhead Crane With Hook Cap.5~10t

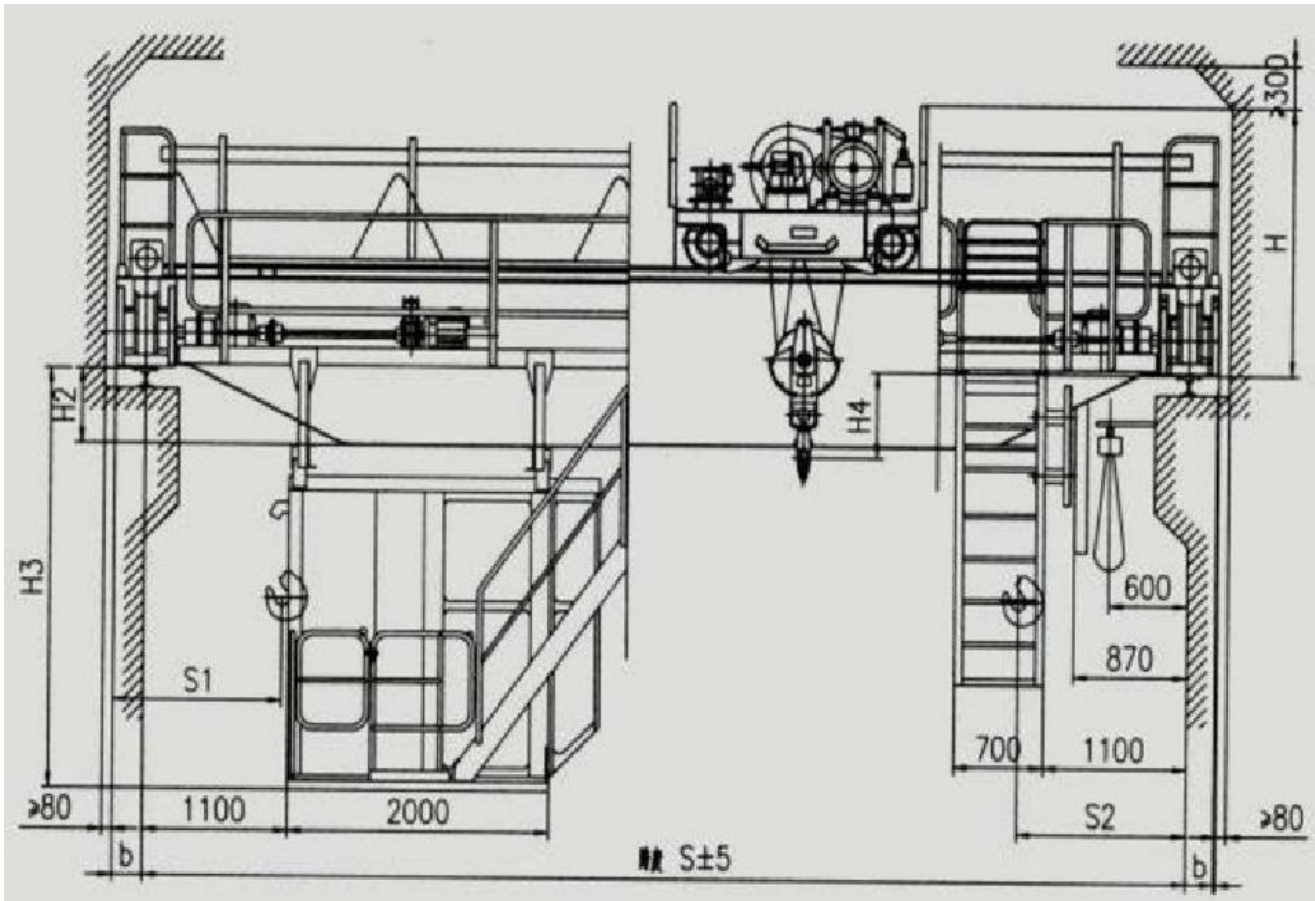

Technical specifications

Cap			5								10									
Span			m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	
Lifting Height				16								16								
Working Duty			A4								A4									
Explosion Proof Class			ExdIIBT4(ExdIICT4)								ExdIIBT4(ExdIICT4)									
Speed	Hoisting	m/min	5								5									
	Crab traveling		19.6(14.6)								20.5(14.6)									
	Trolley travelling		22.3(12)								22.3(12)									
Limit dimension	S1	mm	800								1050									
	S2		1250								1300									
Main dimension	H	mm	1763								1800									
	H1		765								765									
	H2		-24	126	226	376	526	676	826	976	-24	126	226	376	526	678	828	978		
	H3		2396	2546	2646	2796	2946	3096	3246	3396	2396	2546	2646	2796	2946	3098	3248	3398		
	H4		71								602				552					
	K		1400								2000									
	W		3400			3550			5000		4050				5000					
	B		5054			5204			5948		5704			5882			5948			
	b		230																	
Max.Wheel Loading			kN	72	78	84	92	97	109	117	124	101	108	117	122	126	135	144	152	
Total motor power			kw	10								15.5								
Crane Rail Recommended			43kg/m																	
Power Supply			3 - Phase A. C . 5 0 HZ 3 8 0 V																	



QB Explosion-proof Overhead Crane With Hook Cap.16/3.2~20/5t

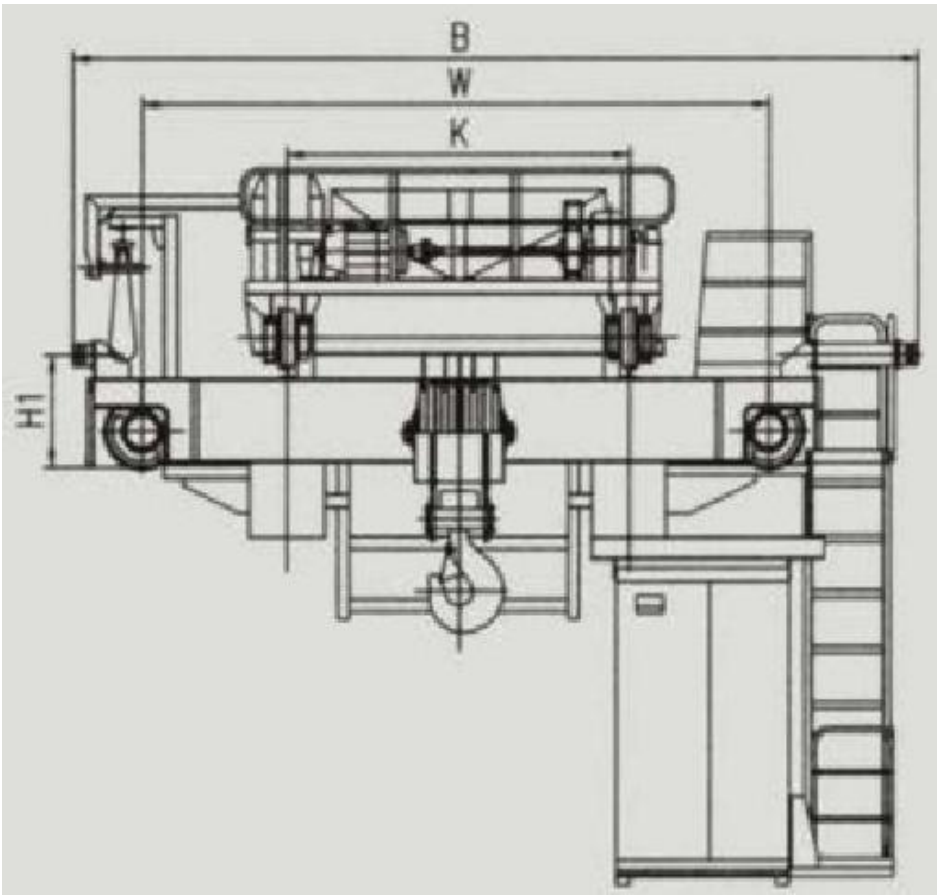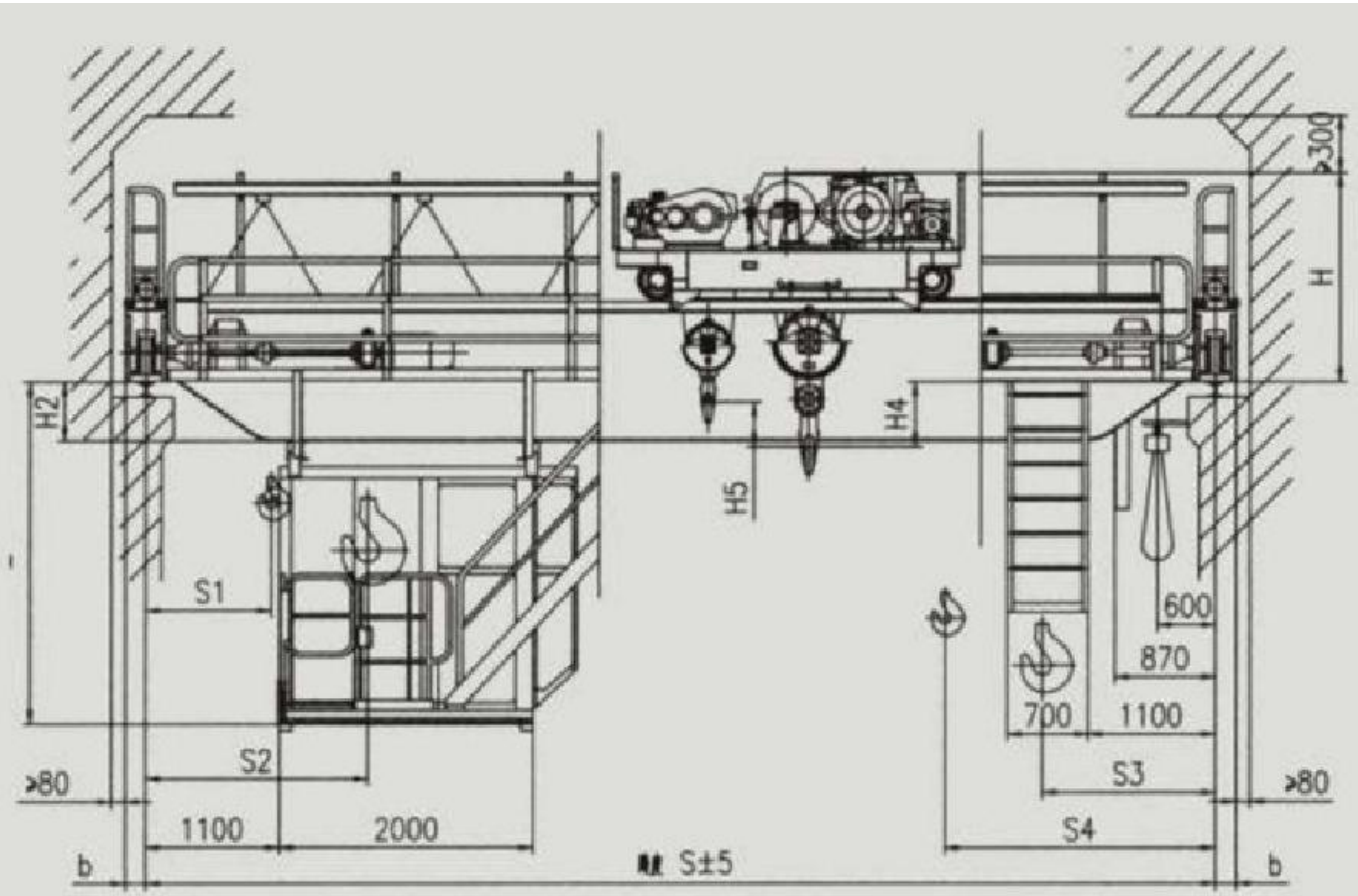

Technical specifications

Cap	Main	t	16								20							
	Aux.		3.2								5							
Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5
Lifting Height	Main		16								12							
	Aux.		18								14							
Working Duty			A4								A4							
Explosion Proof Class			ExdIIBT4(ExdIICT4)								ExdIIBT4(ExdIICT4)							
Speed	Main	m/min	4.3								4.2							
	Aux		5.6								5							
	Crab travelling		20.5(13)								20.5(13)							
	Trolley travelling		19(12.1)								19(12.1)							
Limit dimension	S1	mm	1040								1030							
	S2		1850								1930							
	S3		1500								1420							
	S4		2310								2320							
Main dimension	H	mm	2043		2043						2045		2045					
	H1		765		765						765		765					
	H2		130	230	380	528	678	828	978	130	232	382	530	680	830	980		
	H3		2550	2650	2800	2948	3098	3248	3398	2550	2598	2658	2808	2958	3108	3258		
	H4		860		780						858		858					
	H5		770								496							
	K		2000															
	W		4000		4100		5000				4000		4100		5000			
	B		5864		5928		6438				5864		5928		6438			
	b		230		230						230		230					
Max.Wheel Loading		kN	138	146	152	166	173	185	194	203	160	167	176	189	197	209	220	229
Total motor power		kw	23.9(23.2)								25.7(25)							
Crane Rail Recommended			43kg/m or QU70															
Power Supply			3 - Phase A.C .50HZ 380V															


QB Explosion-proof Overhead Crane With Hook Cap.32/5~50/10t

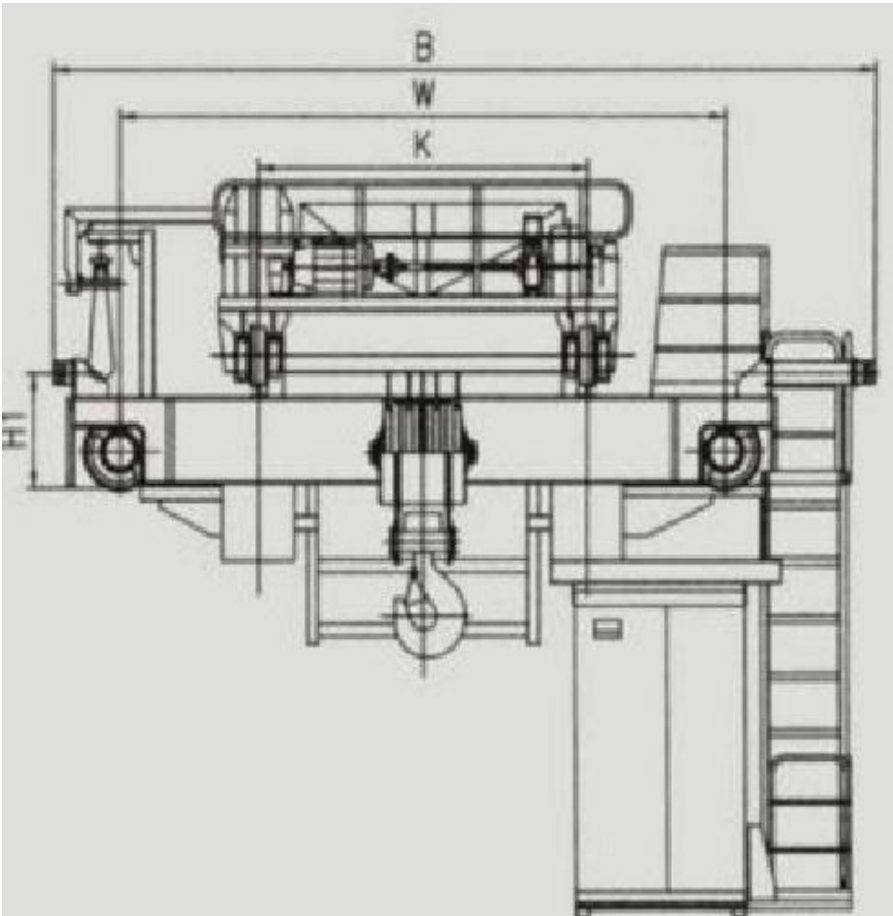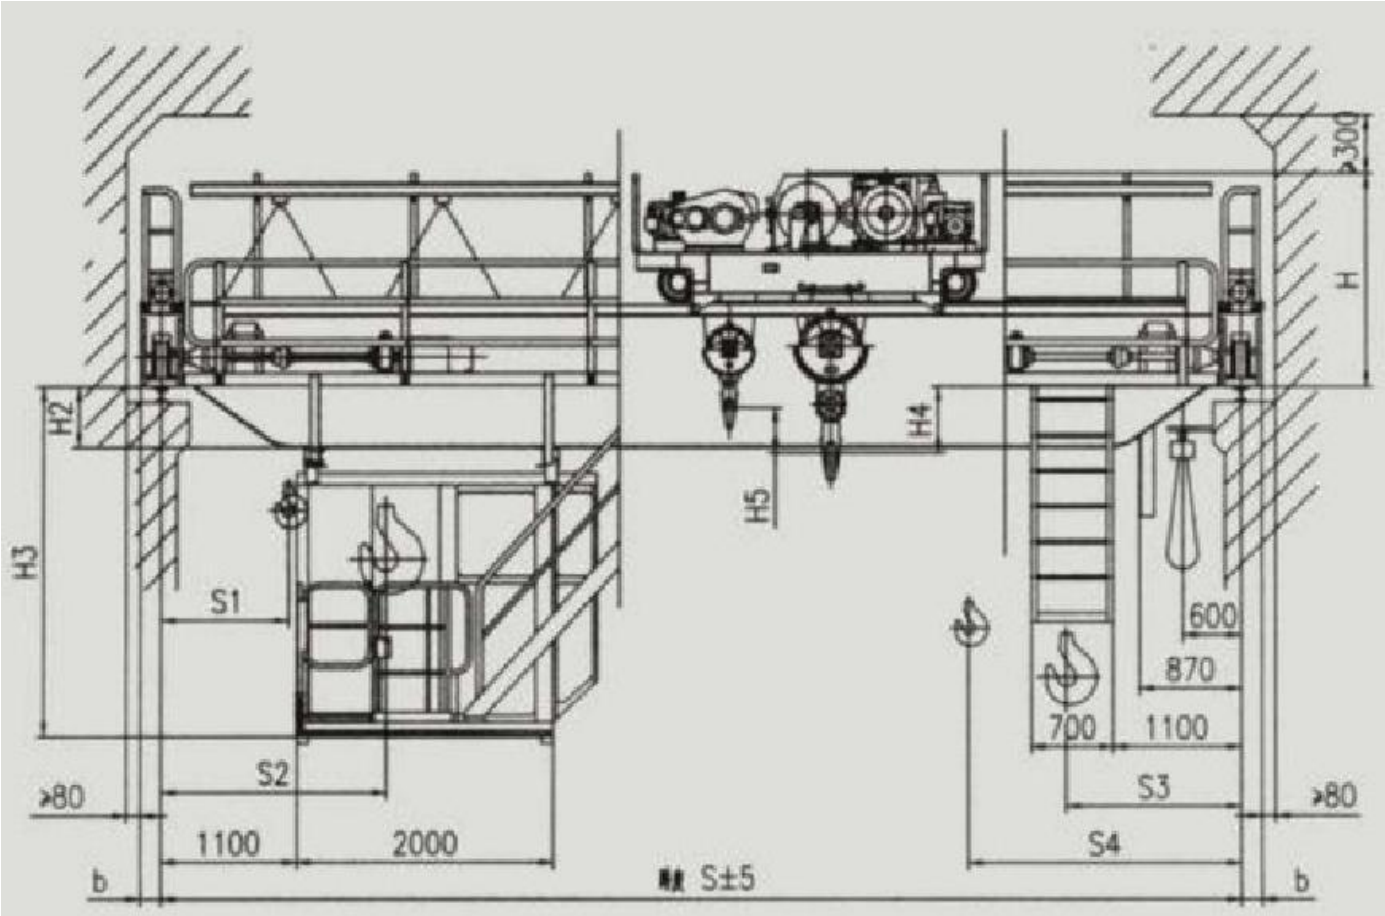

Technical specifications

Cap	Main	t	32								50												
	Aux.		5								10												
Span		m	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5	10.5	13.5	16.5	19.5	22.5	25.5	28.5	31.5					
Lifting Height	Main		16								12												
	Aux.		18								16												
Working Duty			A4								A4												
Explosion Proof Class			ExdIIBT4(ExdIICT4)								ExdIIBT4(ExdIICT4)												
Speed	Main	m/min	4.1								3												
	Aux		5								5												
	Crab travelling		17.5(13)								15.1(15.1)												
	Trolley travelling		19.1(12.4)								17(14.5)												
Limit dimension	S1	mm	1070								1005												
	S2		2050								2200												
	S3		1700								2000												
	S4		2680								3195												
Main dimension	H	mm	2230								2365	2371											
	H1		815								865												
	H2		180	184	334	484	634	784	934	1034	71	246	252	402	552	702	852	952					
	H3		2508	2512	2662	2682	2832	2982	3132	3232	2339	2514	2520	2670	2820	2970	3120	3220					
	H4						800				1020			1014									
	H5		790								948												
	K		2500																				
	W		4650				4700				5000				4800				5000				
	B		6478				6628				6928				6828			6858			7058		
	b		230								260												
Max.Wheel Loading		kN	138	146	152	166	173	185	194	203	160	167	176	189	197	209	220	229					
Total motor power		kw	42.2(40.7)								50.9(49.1)				53.9(49.1)								
Crane Rail Recommended			QU70 or Square steel 90								QU80 or Square steel100												
Power Supply			3-Phase A. C. 50HZ 380V																				


QB Explosion-proof Overhead Crane With Hook Cap.75/20t

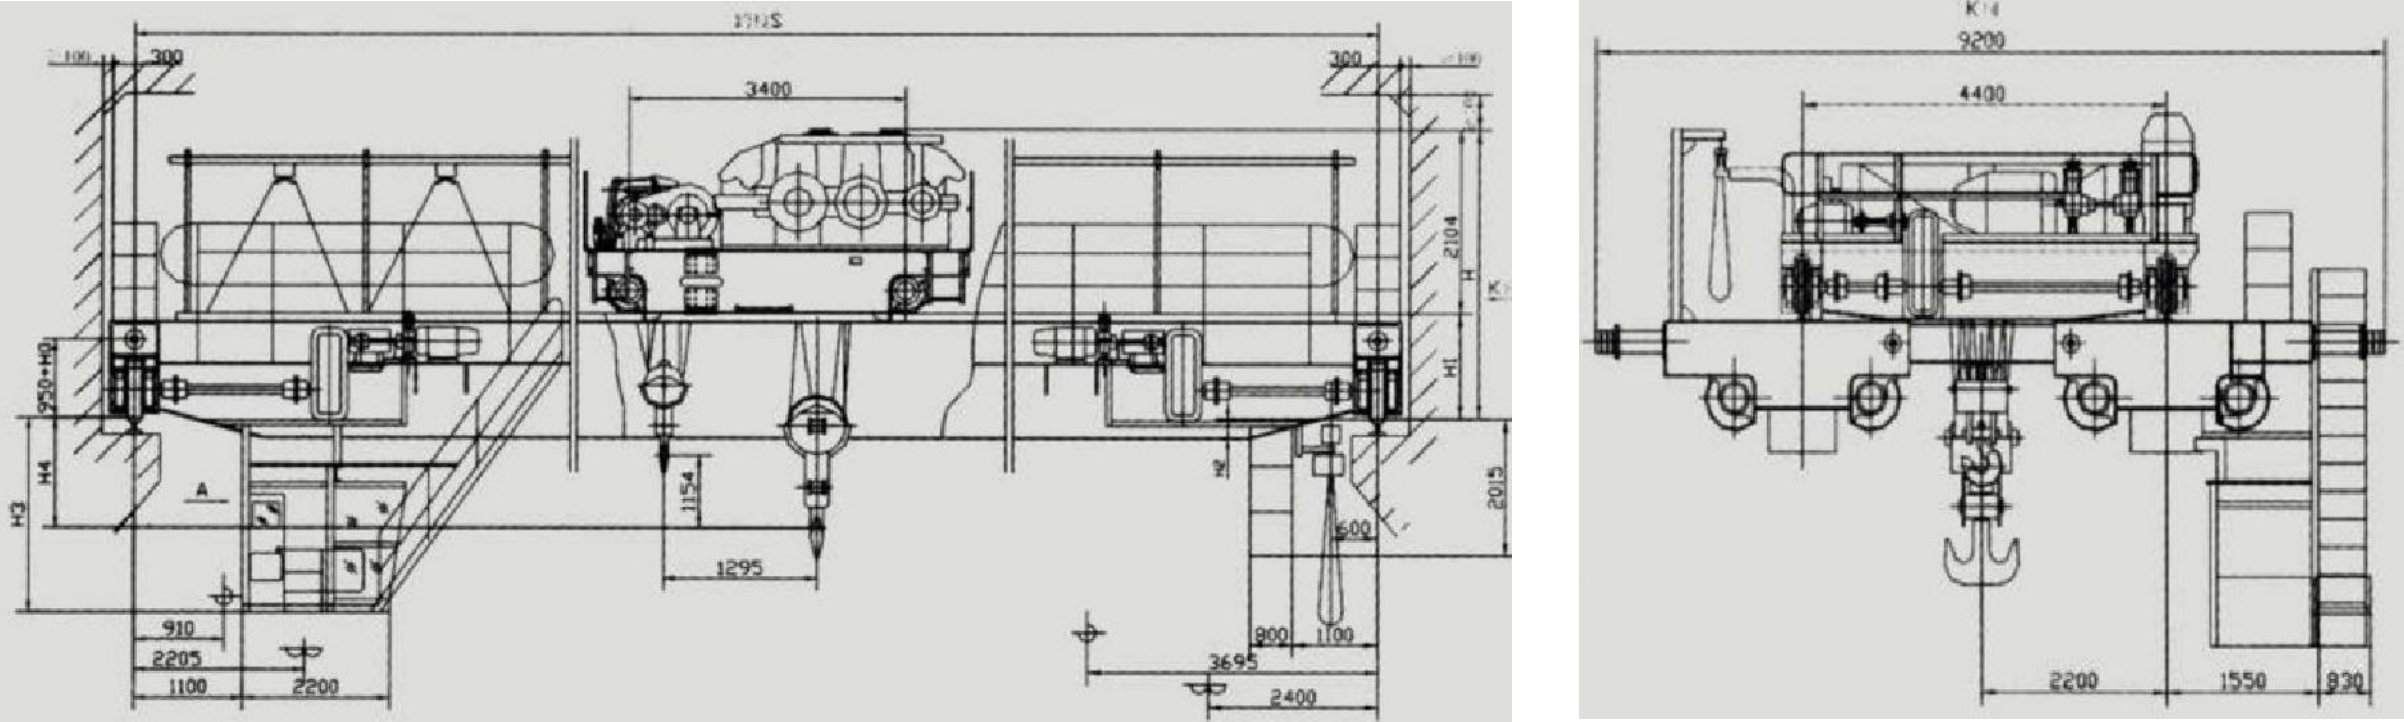

Technical specifications

Lifting capacity		t	75/20						
Span			13. 5	16. 5	19. 5	22. 5	25. 5	28. 5	31. 5
Max.Lifting Height		m	20/22						
Working Duty			A4						
Explosion Proof Class			Exd1IBT4 (Exd1ICT4)						
Speed	Main Lifting	m/min	1. 86						
	Aux Lifting		4. 2						
	Crab travelling		10						
	Trolley travelling		15. 4; (9. 88)				15. 7 (9. 9)		
Motor	Lifting	Type kw	YBZ250M-8/30 (YBZE250M-8)						
	Aux Lifting		YBZ180L-6/15 (YBZE180L-6)						
	Crab travelling		YBZE132M2-6/3. 7						
	Trolley traveling		YBZE132M2-6/3. 7×2				YBZE160M1-6/5. 5×2 YBZE132M2-6/3. 7×2		
Main dimensio n	H	mm	3302	3302	3302	3306	3304	3308	3310
	H1		1318	1318	1318	1322	1320	1324	1326
	H2		290	440	542	546	844	844	850
	H3		2710	2860	2962	2966	3264	3268	3270
	H4		872	872	872	868	870	866	864
Max.Wheel Loading		kN	219	302	314	324	333	345	356
Crane Rail Recommended		kg/m	QU100						
Power Source			3-Phase A . C . 380V 50HZ						
Note: H0 is the increased height of the buffer									

QB Explosion-proof Overhead Crane With Hook Cap.100/30t

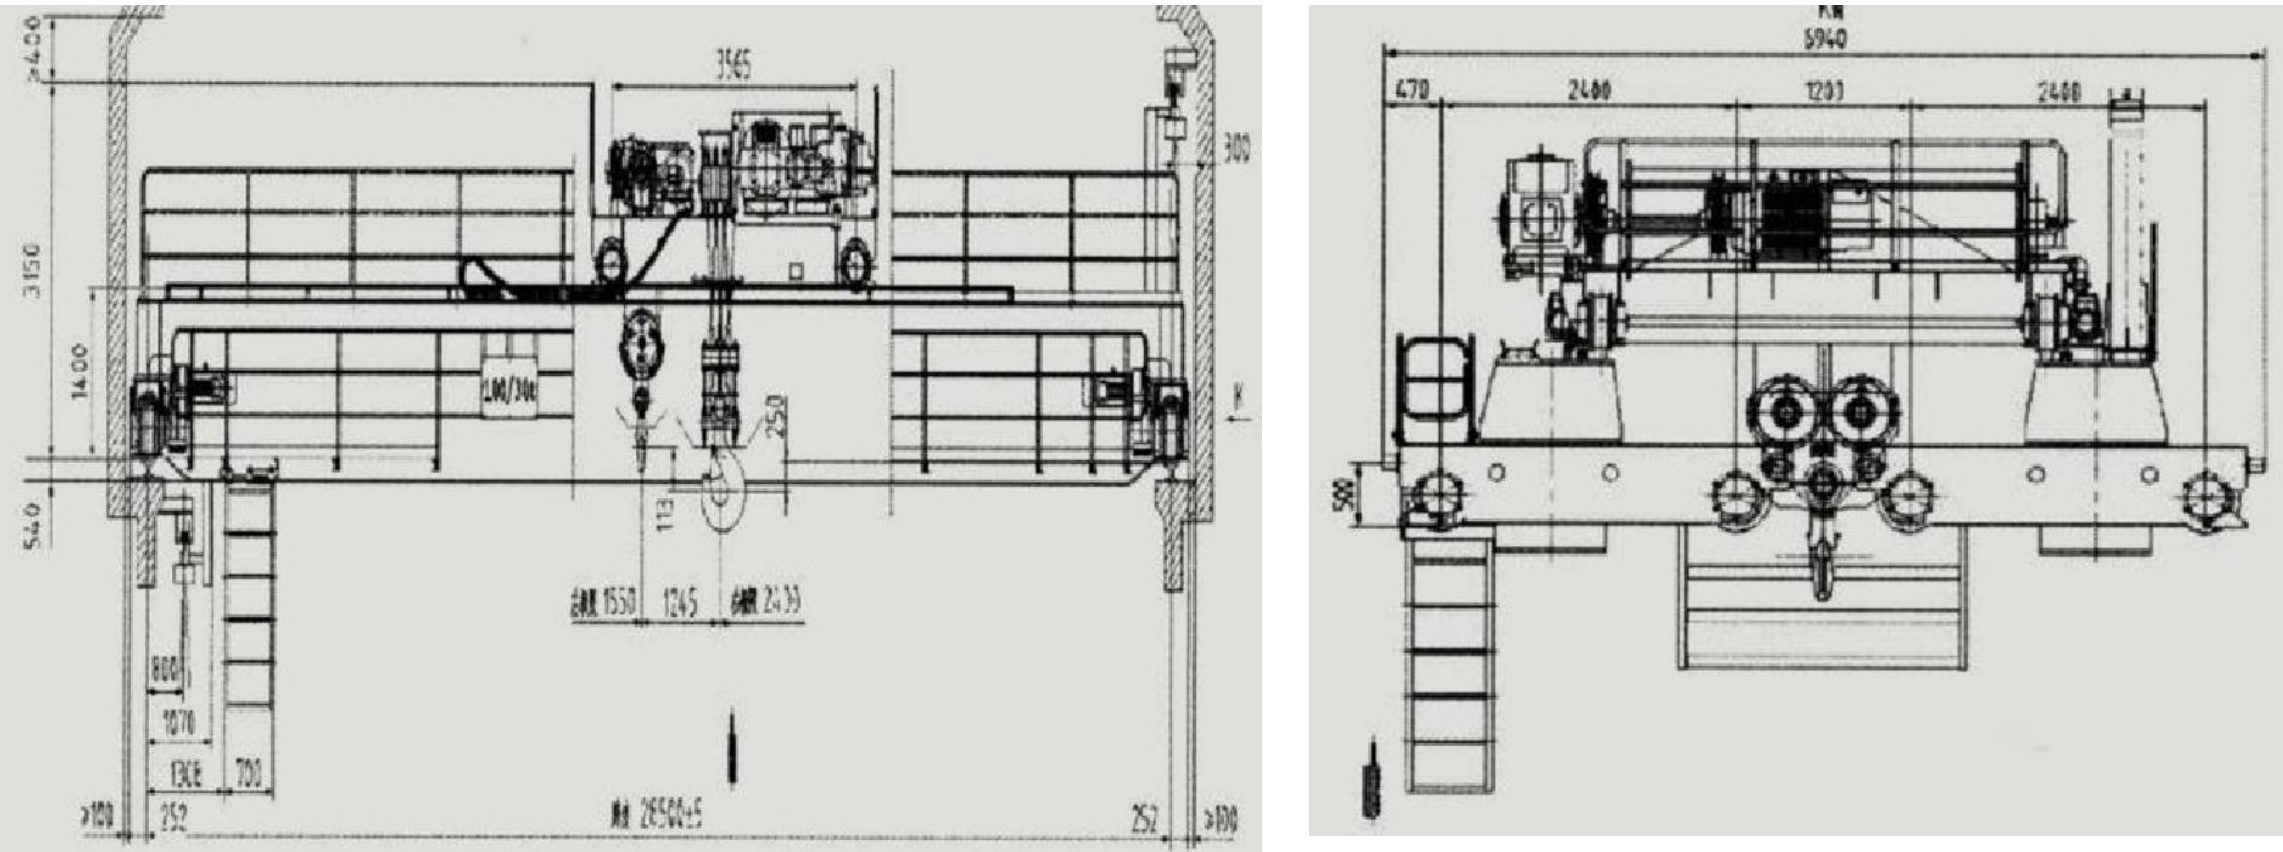

Technical specifications

Lifting capacity		t	100/30			
Span		m	28.5			
Max.Lifting Height		m	13/14			
Working Duty			A4			
Explosion Proof Class			ExdIIBT4(ExdIICT4)			
Speed	Main Lifting	m/min	0.3~3			
	Aux Lifting		0.3~3			
	Crab travelling		0.5~5			
	Trolley travelling		0.5~10			
Total motor power		kw	105.2			
Max.Wheel Loading		kN	361			
Crane Rail Recommended		kg/m	QU100			
Power Source			3P	A.C	50HZ	380V