


Beam-mounted Electromagnetic Lifting Magnets

Parameters

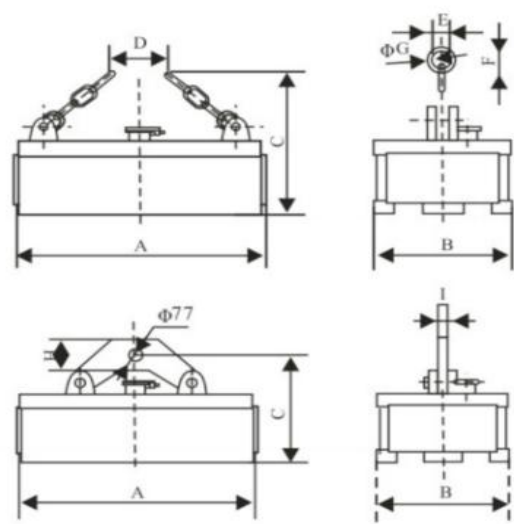

外形尺寸图
Overall dimension sketch

常温型（额定电压DC-220V，通电持续率TD-50%）主要技术参数
Normal temperature type (rated voltage DC-220V, TD-50%) main technical parameters

型 号		MW22-8060L	MW22-11060L	MW22-120100L	MW22-140100L	MW22-140150L
外形尺寸 mm Outline dimension (mm)	A	800	1100	1200	1400	1400
	B	600	600	1000	1000	1500
	C	900	900	950	1100	1100
	D	300	300	300	900	900
	E	110	110	125	125	125
	F	180	180	200	200	200
	G	32	32	50	38	38
	H	200				
	I	50				
自 重 KG		1000	1300	2400	3600	3000
功 率 KW		27.3	34.1	45.5	63.6	81.9
电 流 A		6	7.5	10	14	18
起吊能力(表 内大截面工字 钢如果没有捆 扎, 也可吊起 一层) Lifting capacity (large cross-section of the table if there is no tie, can also lift a layer)	最小规格 Minimum specification	10号工字钢 10 I-beam	10号工字钢 10 I-beam	10号工字钢 10 I-beam	10号工字钢 10 I-beam	10号工字钢 10 I-beam
	最大规格 Maximum specification	20a号工字钢 10 I-beam	30a号工字钢 30a I-beam	63a号工字钢 63a I-beam	50a号工字钢 50a I-beam	50a号工字钢 50a I-beam
	最大长度(mm) Maximum length (mm)	20000	20000	20000	20000	20000
	捆扎宽度(mm) Strapping width (mm)	500	500	1000	1200	1400
	单捆重量(kg) Bale weight (kg)	5000	4000/6000	15000	3000/5000	4500/6000
	捆数 Number of bundles	4台吊1捆 4 cranes and 1 bundles	4台吊1捆 4 cranes and 1 bundles	4台吊2/1捆 4 cranes and 2/1 bundles	4台吊4/2捆 4 cranes and 4/2 bundles	4台吊4/2捆 4 cranes and 4/2 bundles