


Rectangular Electromagnetic Lifting Magnets Assembly

Parameters

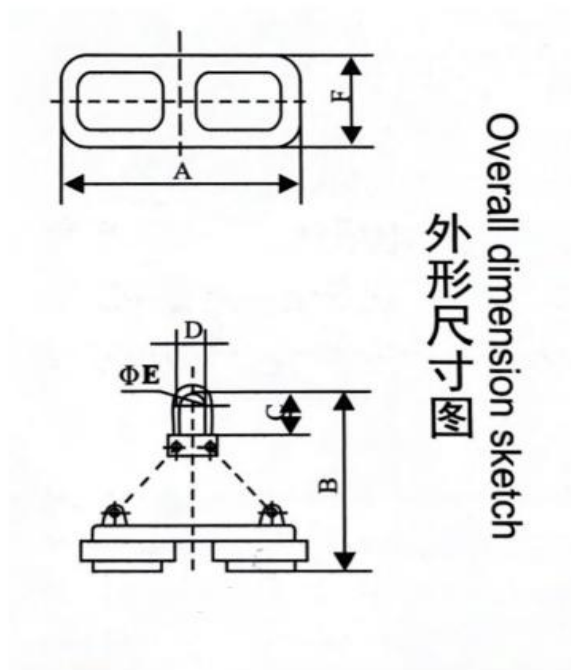

MW16 (MW96) 系列（额定电压DC-220V，通电持续率TD-50%）主要技术参数 Main technical parameters of MW16 (MW96) series (rated voltage DC-220V, TD-50%)

| 吊运方式 Lifting mode                       |                                 | 垂直吊运 Vertical lift |                |                | 水平吊运 Horizontal lifting |             |              |              |
|-----------------------------------------|---------------------------------|--------------------|----------------|----------------|-------------------------|-------------|--------------|--------------|
| 型 号 Model                               |                                 | MW16-19090L/2      | MW16-220100L/2 | MW16-250135L/2 | MW16-13095L             | MW16-14090L | MW16-150110L | MW16-160150L |
| 外形尺寸<br>mm<br>Outline dimension<br>(mm) | A                               | 1920               | 2230           | 2500           | 1320                    | 1450        | 1500         | 1600         |
|                                         | B                               | 1500               | 1800           | 2500           | 1500                    | 1740        | 1770         | 2340         |
|                                         | C                               | 250                | 250            | 500            | 250                     | 310         | 370          | 500          |
|                                         | D                               | 170                | 170            | 230            | 175                     | 230         | 230          | 230          |
|                                         | E                               | 85                 | 85             | 115            | 70                      | 70          | 75           | 115          |
|                                         | F                               | 900                | 1050           | 1350           | 970                     | 950         | 1100         | 1490         |
| 重 量 KG weight(kg)                       |                                 | 4400               | 6600           | 10000          | 3000                    | 3800        | 4136         | 7500         |
| 电 流 A Electric current(A)               |                                 | 68                 | 70             | 91             | 56                      | 59          | 58.7         | 91           |
| 冷态功率 (KW) Electric current(A)           |                                 | 15                 | 14             | 20             | 12.4                    | 13          | 12.9         | 20           |
| 钢带卷<br>coil                             | 重量(t) weight(t)                 | 16                 | 21             | 32             | 17                      | 23          | 16.5         | 32           |
|                                         | 外径(mm)<br>Outside diameter (mm) | 1700               | 2000           | 2160           | 1650                    | 2000        | 1700         | 2200         |
|                                         | 宽度(mm)<br>Width (mm)            | 1220               | 1320           | 1900           | 1320                    | 1530        | 1500         | 1900         |

| 型 号 Model                               |                                 | 立卧两用(带可动磁极) Vertical and horizontal dual-purpose (with movable magnetic pole) |                  |                  |                  |
|-----------------------------------------|---------------------------------|-------------------------------------------------------------------------------|------------------|------------------|------------------|
|                                         |                                 | MW96-140120L/2-6                                                              | MW96-160140L/2-6 | MW96-180150L/2-6 | MW96-190160L/2-6 |
| 外形尺寸<br>mm<br>Outline dimension<br>(mm) | A                               | 1400                                                                          | 1600             | 1800             | 1900             |
|                                         | B                               | 1580                                                                          | 1680             | 1780             | 1980             |
|                                         | C                               | 250                                                                           | 350              | 370              | 370              |
|                                         | D                               | 170                                                                           | 200              | 230              | 230              |
|                                         | E                               | 70                                                                            | 75               | 75               | 80               |
|                                         | F                               | 1200                                                                          | 1400             | 1500             | 1600             |
| 重 量 KG weight(kg)                       |                                 | 4000                                                                          | 800              | 1000             | 13500            |
| 电 流 A Electric current(A)               |                                 | 65                                                                            | 80               | 90               | 81               |
| 冷态功率 (KW) Electric current(A)           |                                 | 14.3                                                                          | 16.8             | 19.8             | 17.8             |
| 钢<br>带<br>卷<br>coil                     | 重量(t) weight(t)                 | 14                                                                            | 24               | 34               | 34               |
|                                         | 外径(mm)<br>Outside diameter (mm) | 1600                                                                          | 1850             | 2025             | 2025             |
|                                         | 宽度(mm)<br>Width (mm)            | 1000                                                                          | 1400             | 1800             | 1800             |