


Strip-shaped Electromagnetic Lifting Magnets

Parameters

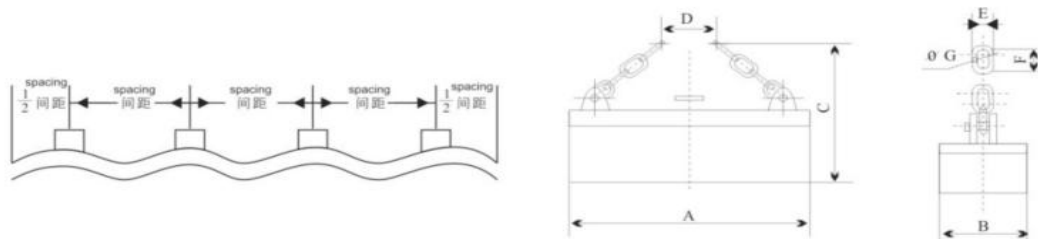

外形尺寸图 Overall dimension sketch

350常温型（额定电压DC-220V，通电持续率TD-60%）主要技术参数
350 normal temperature type (rated voltage DC-220V, TD-60%) main technical parameters

型 号 Model		MW84-9030T	MW84-10535T	MW84-14035T	MW84-17535T	MW84-21035T	MW84-24535T
外形尺寸 mm Outline dimension (mm)	A	900	1050	1400	1750	2100	2450
	B	300	350	350	350	350	350
	C	900	920	940	940	960	980
	D	300	400	500	700	800	900
	E	110	110	110	110	110	110
	F	180	180	180	180	180	180
	G	32	32	32	32	32	32
重量 (KG) weight (kg)		18.5	330	430	510	600	720
冷态功率 (KW) Cold power (kw)		0.41	0.9	1.2	1.5	1.8	2.5
Steel plate thickness (mm) 额定厚度 (mm)	6	长×宽×厚 3000—8000 × 900—1900 × 4—10 L × W × T	2650	3000	3350	3700	4050
	8		3150	3500	3850	4200	4550
	10		3350	3700	4050	4400	4750
	12		3350	3900	4250	4600	4950
	16	四台联用 Four with Taiwan	4050	4400	4750	5100	5450

保证搬运张数举例 Examples of guaranteed handling

钢板宽度 Plate width		1500(mm)					2500(mm)					4000(mm)				
吸吊张数 Suction lift	型号 Model	MW84-1053ST	MW84-1403ST	MW84-1753ST	MW84-2103ST	MW84-2453ST	MW84-1053ST	MW84-1403ST	MW84-1753ST	MW84-2103ST	MW84-2453ST	MW84-1053ST	MW84-1403ST	MW84-1753ST	MW84-2103ST	MW84-2453ST
	Steel plate thickness (mm)	6	8	10	12	16	20	32	6	8	10	12	16	20	32	6
钢板厚度 (mm)	6	4	4	4	4	4	1	3	4	4	4	—	—	—	—	2
	8	3	4	4	4	4	1	2	3	3	3	—	—	—	1	2
	10	3	3	3	3	3	1	2	3	3	3	—	—	1	2	2
	12	3	3	3	3	3	1	2	3	3	3	—	—	1	2	2
	16	2	2	2	2	2	1	2	2	2	2	1	1	1	1	2
	20	2	2	2	2	2	1	1	2	2	2	1	1	1	1	1
	32	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

400型 (额定电压DC-220V, 通电持续率TD-60%) 主要技术参数 Main technical parameters of type 400 (rated voltage DC-220V, TD-60%)

钢板宽度 Plate width		常温型(100℃ 以下)				常温型(600℃ 以下)			
		MW84-12040L	MW84-16040L	MW84-20040L	MW84-24040L	MW84-130421/G	MW84-170421/G	MW84-210421/G	MW84-250421/G
外形尺寸 mm Outline dimension (mm)	A	1200	1600	2000	2400	1260	1680	2100	2520
	B	400				420			
	C	1071	996	970	890	1040	1045	1010	990
	D	400	700	800	700	500	700	800	900
	E	110							
	F	180							
	G	32							
重量(kg) weight (kg)		550	690	840	910	650	850	1050	1250
冷态功率(kw) Cold power (kw)		3.0	3.2	5.0	6.0	2.4	3.7	4.0	4.8
钢板厚度 (mm)	6	可搬运宽度 (mm)	3000	3400	3800	4200	3060	3480	3900
	8	3500	3900	4300	4700	3560	3980	4400	4820
	10	3700	4100	4500	4900	3760	1480	4600	5020
	12	4000	4400	4800	5200	4060	4480	4900	5320
	16	4500	4900	5300	5700	4560	4980	5400	5820

保证搬运张数举例 Examples of guaranteed handling

[illegible]