


水电站用门式起重机

Gantry crane For Hydroelectric Power Staion

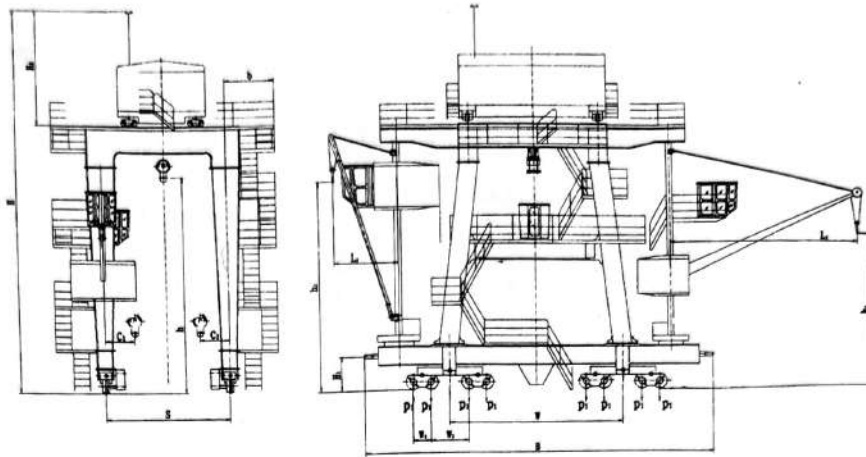


技术参数 Technological parameter

起重量 Lifting Weight	主起升机构 Main Lifting Mechanism		400	450
	回转吊起升机构Lifting Mechanism for Jib Crane	1号 NO.1	80	65
		2号 NO.2	32	2X125
工作级别 Classification group	起重机 Gantry crane		A2	A2
	回转吊Jib Crane		A3	A3
跨度S (m) SpanS (m)			12	8
起升范围 Lifting Range	主起升机构 Main Lifting Mechanism		90.5	65
	回转吊起升机构Lifting Mechanism for Jib Crane	1号 NO.1	40	62
		2号 NO.2	75	75
工作速度 Working Speed(m/min)	主起升机构 Main Lifting Mechanism		2.22	2.2
	回转吊起升机构Lifting Mechanism for Jib Crane	1号 NO.1	4	4
		2号 NO.2	8.3	5
	小车运行机构 Traversing Mechanism		2.08	2.08
大车运行机构 Traversing Mechanism		21.6	19.5	
极限尺寸 Limit Dimensions(mm)	回转机构 Slewing Mechanism	1号 NO.1	0.4	0.4
		2号 NO.2	0.37	
主要尺寸 (mm) Main Size	C ₁		2800	2800
	C ₂		2800	28800
	H		30452	30599
	B		13800	12800
	b		1386	2400
	w		9500	8500
	w ₁		1100	1100
	w ₂		1800	1800
	H ₁			3356
	H ₂		18800	13428
	h		16500	15000
	h ₁		16500	12000
	h ₂		26000	15000
	L ₁		6000	10000
	L ₂		8000	6000
最大轮压(KN) Max. Wheel Load(KN)	p ₁	975	910	
	p ₂	805	910	
荐用钢轨 Steel track			QU120	QU120
电动机总功率(kw) motor total power(kw)			364	376.5
电源 Power Supply			交流三相380v 50HZ	3-Phase A C 380v 50HZ

水电站用门式起重机

Gantry crane For Hydroelectric Power Staion

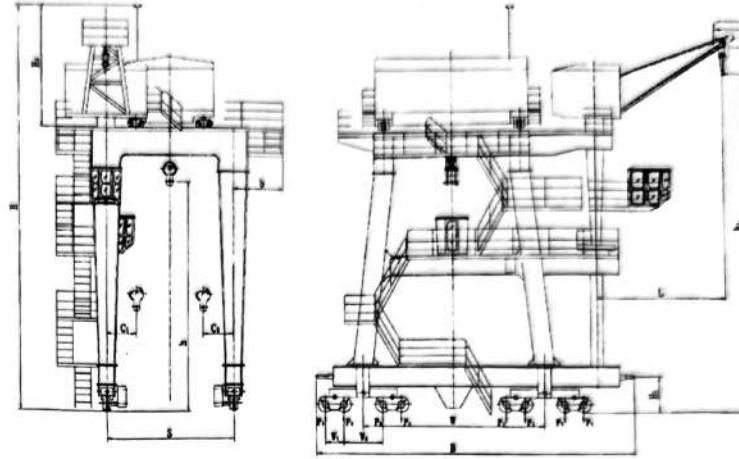


技术参数 Technological parameter

起重量 Lifting Weight	主起升机构 Main Lifting Mechanism	350
	回转吊起升机构Lifting Mechanism for Jib Crane	30
工作级别 Classification group	起重机 Gantry crane	A2
	回转吊Jib Crane	A3
跨度S (m) SpanS (m)		12
起升范围 Lifting Range	主起升机构 Main Lifting Mechanism	80
	回转吊起升机构Lifting Mechanism for Jib Crane	62
工作速度 Working Speed(m/min)	主起升机构 Main Lifting Mechanism	2.2
	回转吊起升机构Lifting Mechanism for Jib Crane	8.05
	小车运行机构 Traversing Mechanism	4.25
	大车运行机构 Traversing Mechanism	14.85
	回转机构 Slewing Mechanism	0.42
极限尺寸 Limit Dimensions(mm)	C ₁	2600
	C ₂	2600
主要尺寸 (mm) Main Size	H	31258
	B	18085
	b	3750
	w	9200
	w ₁	1100
	w ₂	1800
	H ₁	
	H ₂	13758
	h	2300
	h ₁	15000
	L ₁	7550
最大轮压(KN) Max. Wheel Load(KN)	p ₁	865
	p ₂	645
荐用钢轨 Steel track		QU120
电动机总功率(kw) motor total power(kw)		329.5
电源 Power Supply		交流三相380v 50HZ 3-Phase A C 380v 50HZ

水电站用门式起重机

Gantry crane For Hydroelectric Power Staion

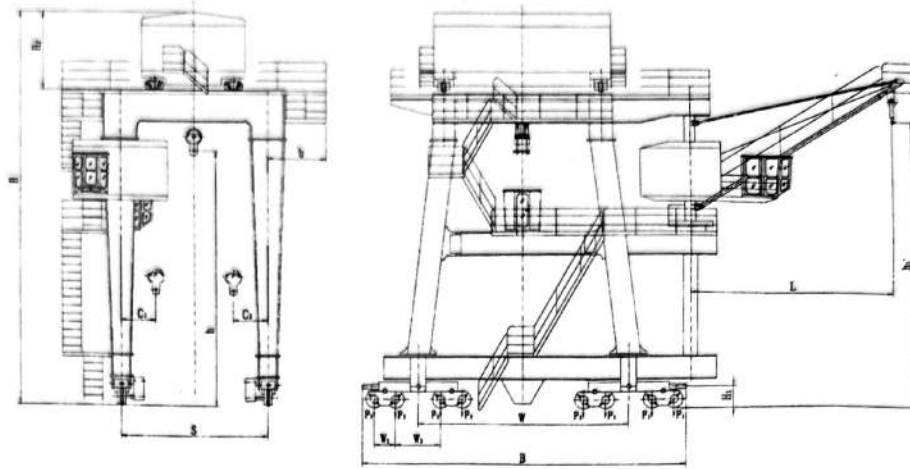


技术参数 Technological parameter

起重量 Lifting Weight	主起升机构 Main Lifting Mechanism	100	125	200	250	320
	回转吊起升机构Lifting Mechanism for Jib Crane	10	10	32	32	40
工作级别 Classification group	起重机 Gantry crane	A2	A2	A2	A2	A2
	回转吊Jib Crane	A3	A3	A3	A3	A3
跨度S(m) SpanS(m)		16	13	12	8.5	14
起升范围 Lifting Range	主起升机构 Main Lifting Mechanism	20	90	50	70	69
	回转吊起升机构Lifting Mechanism for Jib Crane	25	50	60	70	58
工作速度 Working Speed(m/min)	主起升机构 Main Lifting Mechanism	2.8	2.16	2.06	2.2	2.5
	回转吊起升机构Lifting Mechanism for Jib Crane	8	11.6	7.93	8.3	5
	小车运行机构 Traversing Mechanism	6.2	8.18	5.38	4.86	6
	大车运行机构 Traversing Mechanism	22	23.3	22	22.2	20
	回转机构 Slewing Mechanism	0.4	0.9	0.4	0.4	0.4
极限尺寸 Limit Dimensions(mm)	C ₁	2500	2500	3000	2650	3000
	C ₂	2500	2500	2300	2650	2400
主要尺寸 (mm) Main Size	H	29300	30142	29395	25530	30500
	B	1600	15937	14300	14300	14381
	b	2500	2500	2600	2500	3000
	w	9000	9000	8500	9200	9000
	w ₁	960	960	960	960	960
	w ₂	1100	1100	1100	1100	1100
	H ₁	1200	800	815	815	880
	H ₂	13172	13172	10055	7680	11330
	h	15000	15000	18000	15370	15500
	h ₁	13000	13000	22000	16000	12500
	L	13000	13000	12000	9000	9000
最大轮压(KN) Max. Wheel Load(KN)	p ₁	550	602	550	480	740
	p ₂	485	500	480	480	620
荐用钢轨 Steel track		QU100	QU100	QU100	QU100	QU100
电动机总功率(kw) motor total power(kw)		104.5	104.5	241	270	271
电源 Power Supply		交流三相380v 50HZ		3-Phase A C 380v 50HZ		

水电站用门式起重机

Gantry crane For Hydroelectric Power Staion

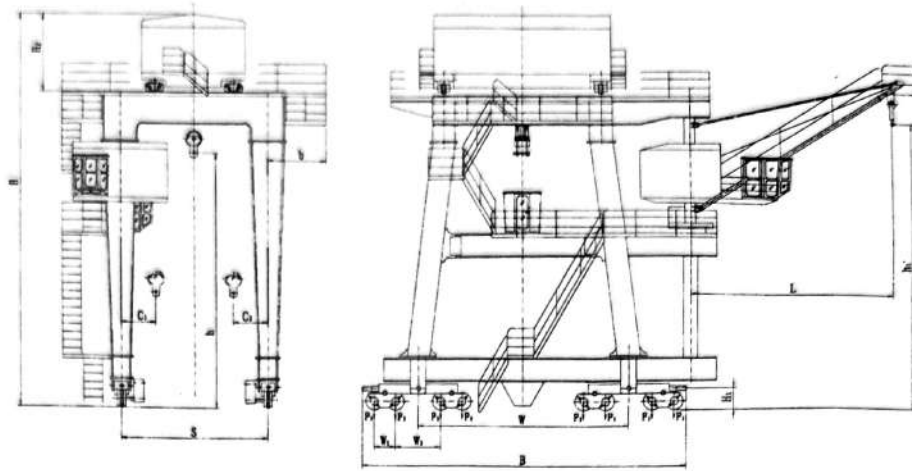


技术参数 Technological parameter

起重量 Lifting Weight	主起升机构 Main Lifting Mechanism	100	125	200	250	320
	回转吊起升机构Lifting Mechanism for Jib Crane	10	10	32	32	40
工作级别 Classification group	起重机 Gantry crane	A2	A2	A2	A2	A2
	回转吊Jib Crane	A3	A3	A3	A3	A3
跨度S(m) SpanS(m)		16	13	12	8.5	14
起升范围 Lifting Range	主起升机构 Main Lifting Mechanism	20	90	50	70	69
	回转吊起升机构Lifting Mechanism for Jib Crane	25	50	60	70	58
工作速度 Working Speed(m/min)	主起升机构 Main Lifting Mechanism	2.8	2.16	2.06	2.2	2.5
	回转吊起升机构Lifting Mechanism for Jib Crane	8	11.6	7.93	8.3	5
	小车运行机构 Traversing Mechanism	6.2	8.18	5.38	4.86	6
	大车运行机构 Traversing Mechanism	22	23.3	22	22.2	20
	回转机构 Slewing Mechanism	0.4	0.9	0.4	0.4	0.4
极限尺寸 Limit Dimensions(mm)	C ₁	2500	2500	3000	2650	3000
	C ₂	2500	2500	2300	2650	2400
主要尺寸 (mm) Main Size	H	29300	30142	29395	25530	30500
	B	1600	15937	14300	14300	14381
	b	2500	2500	2600	2500	3000
	w	9000	9000	8500	9200	9000
	w ₁	960	960	960	960	960
	w ₂	1100	1100	1100	1100	1100
	H ₁	1200	800	815	815	880
	H ₂	13172	13172	10055	7680	11330
	h	15000	15000	18000	15370	15500
	h ₁	13000	13000	22000	16000	12500
最大轮压(KN) Max. Wheel Load(KN)	p ₁	550	602	550	480	740
	p ₂	485	500	480	480	620
荐用钢轨 Steel track		QU100	QU100	QU100	QU100	QU100
电动机总功率(kw) motor total power(kw)		104.5	104.5	241	270	271
电源 Power Supply		交流三相380v 50HZ		3-Phase A C 380v 50HZ		

水电站用门式起重机

Gantry crane For Hydroelectric Power Staion

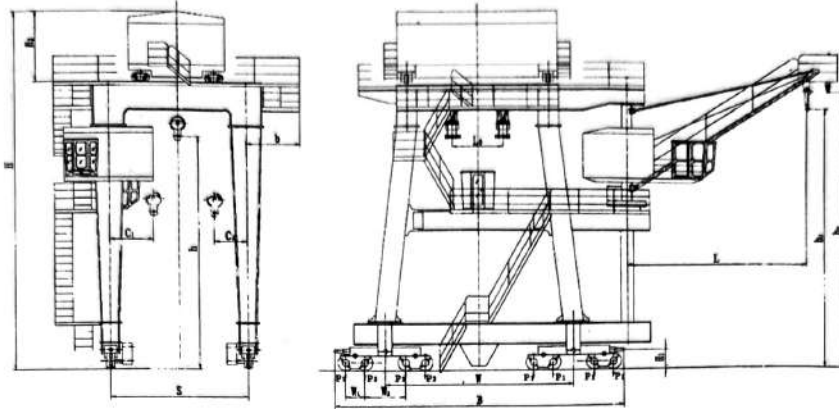


技术参数 Technological parameter

起重量 Lifting Weight	主起升机构 Main Lifting Mechanism		2x125				2x250
	回转吊起升机构Lifting Mechanism for Jib Crane		32				27
工作级别 Classification group	起重机 Gantry crane		A2				
	回转吊Jib Crane		A3				
跨度S (m) SpanS (m)			8 ~ 16				15
起升范围 Lifting Range	主起升机构 Main Lifting Mechanism		70	75	70	75	50
	回转吊起升机构Lifting Mechanism for Jib Crane	主钩 Main Hook					50
		副钩 Aux. Hook	2.5				2.1
工作速度 Working Speed(m/min)	主起升机构 Main Lifting Mechanism		8				7.07
	回转吊起升机构Lifting Mechanism for Jib Crane		—				7.09
	小车运行机构 Traversing Mechanism		6.2				3.98
	大车运行机构 Traversing Mechanism		22				21.4
	回转机构 Slewing Mechanism		0.4				0.48
极限尺寸 Limit Dimensions(mm)	C ₁		2400	2700			2800
	C ₂		1700				2800
主要尺寸 (mm) Main Size	H		19640 ~ 28640				33325
	B		19000 21000				20700
	b		23000				2400
	w		11920 13920				12000
	w ₁		960				960
	w ₂		1100				1100
	H ₁		815				1200
	H ₂		5640				10385
	h		14000 ~ 23000				15000
	h ₁		12000 ~ 21000				17000
	h ₂						17500
	L		9000 ~ 15000				23000
	L ₀		5000 10000				5200
	最大轮压 Max.Wheel Load	p ₁		525 ~ 600			
p ₂		450 ~ 530				880	
荐用钢轨 Steel track			QU100				QU120
电动机总功率(kw) motor total power(kw)			265.5				353.5
电源 Power Supply			交流三相380v 50HZ 3-Phase A C 380v 50HZ				

水电站用门式起重机

Gantry crane For Hydroelectric Power Staion

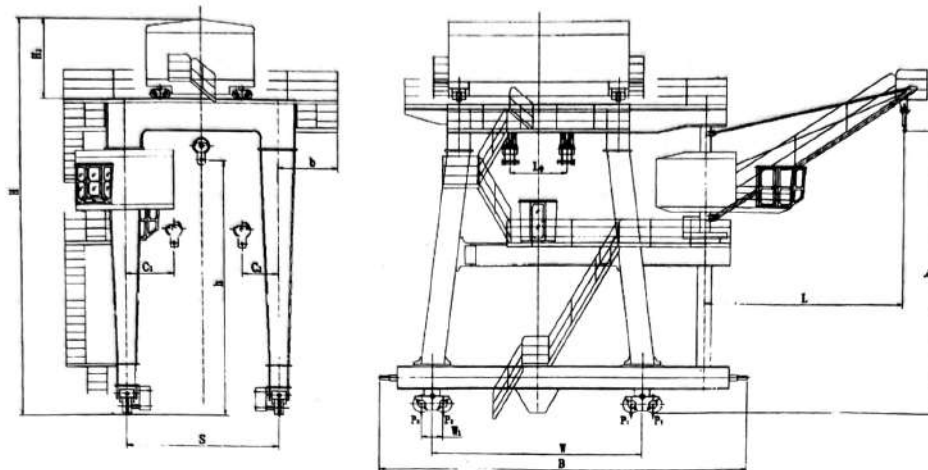

技术参数 Technological parameter

起重量 Lifting Weight	主起升机构 Main Lifting Mechanism	2X50		2X63		2X80		2X100	
	回转吊起升机构Lifting Mechanism for Jib Crane	20		20		20		20	
工作级别 Classification group	起重机 Gantry crane	A2							
	回转吊Jib Crane	A3							
跨度S (m) SpanS (m)		8-16							
起升范围 Lifting Range	主起升机构 Main Lifting Mechanism	60	40	60	40	60	40	60	40
	回转吊起升机构Lifting Mechanism for Jib Crane	60 60 60						70	75
工作速度 Working Speed(m/min)	主起升机构 Main Lifting Mechanism	2.5							
	回转吊起升机构Lifting Mechanism for Jib Crane	8							
	小车运行机构 Traversing Mechanism	6.2							
	大车运行机构 Traversing Mechanism	22							
	回转机构 Slewing Mechanism	0.4							
极限尺寸 Limit Dimensions(mm)	C ₁	2400						2400	2700
	C ₂	1700							
主要尺寸 (mm) Main Size	H	19150-28150				19340-28340		19640-28640	
	B	16400	18400	16400	18400	19000	21000	19000	21000
	b	2300							
	w	11960	13960	11960	13960	11920	13920	11290	13290
	w ₁	960				960			
	w ₂	815				1100			
	H ₁					815			
	H ₂	5150				5640			
	h	14000 ~ 23000				14000 ~ 23000			
	h ₁	12000 ~ 21000				12000 ~ 21000			
	L	9000 ~ 15000		9000 ~ 12000		9000 ~ 15000			
	L ₀	5000	10000	5000	10000	5000	10000	5000	10000
	最大轮压 Max.Wheel Load	p ₁	650 ~ 710		670 ~ 760		415 ~ 490		470 ~ 550
p ₂		495 ~ 575		535 ~ 625		345 ~ 410		395 ~ 470	
荐用钢轨 Steel track		QU100							
电动机总功率(kw) motor total power(kw)		135		149		182.5		225.5	
电源 Power Supply		交流三相380v 50HZ				3-Phase A C 380v 50HZ			